



Holiday Light Co.

EST. · FIELD OPERATIONS

Field Training Manual



Department: Field Operations

Chapters: 12

Classification: Internal Use Only

Table of Contents



PART I — GETTING STARTED

Chapter 1: Welcome

New Hire Paperwork • Seasonal Schedule • Team Structure

Chapter 2: Daily Operations

Daily Schedule • Workday Expectations • Scorecard System • Conduct & Expectations

Chapter 3: Software & Apps

Payroll Platform • Field Service App • Project Photo App

PART II — TOOLS & MATERIALS

Chapter 4: Tools & Equipment

Ladders • Glue Gun • Staple Gun • Screwdriver • Pliers • Measuring Wheel • Wire & Ties • Painters Pole • Limb Cutters

Chapter 5: Vehicle Use & Checklists

Vehicle Expectations • Expense Tracking • Fleet Truck Morning Check-List

Chapter 6: Materials

Mini Lights • Clips • Attachment Methods • Ground Stakes • Bulbs • Spheres • Wire • Timers • Vampire Plugs

PART III — INSTALLATION TECHNIQUES

Chapter 7: Ladder Safety

Little Giant • Extension Ladder • Palms • Trees • Cactus • Canopies

Chapter 8: Landscape Lighting

Ground Wiring • Trees • Canopy Wrap • Spheres • Palms • Bushes • Troubleshooting

Chapter 9: Residential Roofline Installs

Workflow • Starting Points • Measuring • Cut & Bulb • Prepping • Hanging • Wiring • Quality Check • Cleanup

Chapter 10: Windows, Walls, Stakes & Specialty

Windows • Walls • Ground Stakes • Railings • Pillars • Arches

Chapter 11: Holiday Greenery

Wreaths • Split Wreaths • Garland • Bows

PART IV — END OF SEASON

Chapter 12: Removing Lights & Decor

Removals Checklist • Removals Workflow

APPENDIX

Glossary of Terms





Welcome

New Hire Paperwork & Onboarding

Before your first day in the field, the following must be completed:

NEW HIRE ONBOARDING CHECKLIST


☐ Employment Agreement	☐ Account Setup & Access
☐ HR Platform	☐ Project Photo App
☐ Team Chat	☐ Gas Card
☐ Payroll Setup	☐ W4
☐ I-9	☐ State Tax Form
☐ Drivers License	

Seasonal Schedule Overview

BLACK OUT DAYS

Black Out Days are reserved schedule days — no one may call out or use vacation time on these dates.

The holiday lighting season follows a general timeline each year. Exact dates shift, but the pattern stays consistent.



Month	Phase	Schedule Details
September	Pre-Season	Weekdays: Black Out Days • Weekends: Off
October	Ramp-Up	Weekdays: Black Out Days • Saturdays: On Call • Sundays: Off
PEAK SEASON		
November	Peak Installs	Nearly all days are Black Out Days • Commercial work begins early Nov • Thanksgiving + day after: Off
December	Wind-Down	Week 1: Black Out Days on weekdays • Week 2+: On Call shifts • Late Dec: Days off
POST-SEASON		
January	Removals	Weekdays: Black Out Days through most of the month • Saturdays taper off
February	Overflow	All remaining removal work completed • Schedule flexes as needed

Team Structure

★ Operations Manager

- Oversees all field operations, scheduling, and crew coordination

↖ Installation Crews

- Execute installations with a focus on quality
- Work in 2-man crews (Senior & Junior)

Reports to: Operations Manager

☑ Quality Pros

- Inspect completed installs immediately
- Evaluate every work order line item
- Sloppy work docks crew points

Reports to: Operations Manager

⚡ Repairmen

- Service weather or negligence damage post-install
- Ensure ongoing customer support

Reports to: Operations Manager

CHAPTER 1 — KEY TAKEAWAYS

- ✦ Complete all onboarding paperwork before your first day in the field
- ✦ November is peak season — nearly all days are Black Out Days
- ✦ All crews work in 2-man teams and report to the Operations Manager
- ✦ Quality Pros inspect every job — sloppy work costs your crew points

CHAPTER 2

Daily Operations

Daily Schedule

Your day runs on a tight timeline. Arrive at 7:00 AM sharp.

WARNING

Arriving after 7:15 AM will result in an attendance dock on your scorecard.

1**7:00 AM — Arrive at Shop**

Clock in and prepare for the day. Do not be late.

2**7:15 AM — Morning Project Task Review**

Review today's projects with your Senior Installer.

3**7:15–7:50 AM — Prep Check**

Both Jr & Sr run through the Fleet Truck Morning Check-List (see Chapter 5).

4**8:00 AM — Gas Stop**

Fill up the truck. Keep the receipt for the drop box.

5**8:15 AM — En Route**

Head to your first project. Contact the customer when en route.

6**9:00 AM — Arrive at First Project**

Begin the install workflow.

7**7:00 PM — Offload at Warehouse**

Return materials and organize the truck.

8**7:15 PM — Return Keys, EOD**

Drop keys and receipts in the key drop box. Day complete.

Workday Expectations

You are paid for an average of 12 hours per day, however your day ends when your last project is finished.

FINISHED EARLY

You have 2 projects worth \$3,000. You complete both by 5pm. Check in with your Operations Manager — once approved, you're free to clock out. You will still be paid for all 12 hours.

RUNNING LATE

You have 2 projects worth \$3,000. The jobs take longer than expected. You are expected to finish the projects before returning to the shop and clocking out.

REMEMBER

Work Mon–Fri, weekends as needed during peak season. All assigned projects **must** be completed.

Scorecard System

The scorecard tracks your performance across two categories: general daily conduct and individual project quality.

EARN POINTS

Working “after hours” and referring a friend who stays through the entire season.

Category	Points	Deductions
GENERAL SCORECARD (DAILY)		
Uniform	+1	-1
Attendance	+1	-1
On-Time	+1	-1
Vehicle Clean	+1	-1
All Projects Completed	+1	-3 (Reschedule)
PROJECT SCORECARD (PER JOB)		
Contacted Customer	+0.5	-0.5
Lawn Sign	+0.5	-0.5
Project Checklists	+0.5	-0.5
Jobsite Clean	+0.5	-0.5
Timer & Power	+0.5	-0.5
Line Items Accuracy	+2.5	-5 (Forced Redo)

DEDUCTION ALERT

Missing customer contact, no lawn sign, incomplete checklists, dirty job site, no timer/power, or incomplete line items all cost you points.

Conduct & Expectations**Uniforms**

White Shirt, Green Pants, Company
Hat, and Belt

**Expense Cards**

Gas card per truck. Keep all
receipts. Drop in key drop box daily

**Work Chats**

All work chats will remain
professional in conduct

ALLOWED

- ✓ Smoking with discretion (never on customer property)
- ✓ Music in headphones or speaker (mind lyrics)
- ✓ Respectful customer communication

NOT ALLOWED

- ✗ Drugs & Alcohol — we reserve the right to drug test
- ✗ Unprofessional conduct in work chats
- ✗ Arguing with customers — escalate to your Ops Manager

CUSTOMER ESCALATION

If a customer has an issue you cannot resolve, keep your composure and contact your Operations Manager immediately.

CHAPTER 2 — KEY TAKEAWAYS

- ✦ Arrive by 7:00 AM — after 7:15 is an attendance dock
- ✦ You are paid for 12 hours; your day ends when your last project is done
- ✦ The scorecard directly impacts your standing — protect your points
- ✦ Uniform, receipts, clean vehicle, and professional conduct are non-negotiable

CHAPTER 3

Software & Apps

Three apps power your daily workflow. Learn them well — you will use them every day.

**Payroll Platform**

Pay info, timesheets, time off, benefits, and employment documents

**Field Service App**

View daily schedule, job details, and close out completed work

**Project Photo App**

Upload job photos, complete checklists, scan documents, view nearby projects

Project Status Tags

These tags are applied to projects in the Photo App to track their current state:

Tag	Meaning
IN PROGRESS	
Awaiting Additional Product	Job needs more materials before it can be completed
Partially Complete	Some but not all line items are finished
Needs Boom to Complete	Job requires a boom lift to finish
Needs Garland/Wreath	Job is waiting on greenery materials
CHANGE ORDERS	
Change Order	A change order has been submitted
Change Order Complete	Change order work is finished
QUALITY & CLOSEOUT	
Failed Quality Assurance	Job did not pass QA inspection
Invoice Sent	Invoice has been sent to customer
Uncontrollable Damage	Damage from weather or other uncontrollable factors

CHAPTER 3 — KEY TAKEAWAYS

- ✦ The Payroll Platform manages your pay, timesheets, and time-off requests
- ✦ The Field Service App is where you view schedules and close out jobs
- ✦ The Project Photo App documents every install — always complete checklists
- ✦ Learn the status tags so you can communicate project state accurately



CHAPTER 4

Tools & Equipment

***K**now your tools inside and out. Every installer carries these daily.*

**Little Giant Ladder**

A-frame with adjustable lock mechanisms

**Extension Ladder**

Propping up, raising with rope, ladder spotting

**Glue Gun**

Load glue & batteries. Clean surfaces before applying

**Staple Gun**

Loading & techniques. Never staple through wire

**Flathead Screwdriver**

Prying open flashing and prying out nails

**Needle Nose Pliers**

Cutting lines & wire, closing plugs

**Measuring Wheel**

Roofline & ground measurements. Add 2 extra feet

**Bailing Wire & Zip Ties**

Greenery & railing installs. Cut zip tie tails

**Painters Pole & Limb Cutters**

Hanging/removing lights on hedges. Trim overgrown branches

PRO TIP

Clear out cracks and clean the surface before applying glue for the strongest hold.

DANGER

Never cut live wire. Stapling through the line will cause a power short.

TRAINING VIDEOS

See training videos for Little Giant setup, Extension Ladder use, and all tool techniques.

CHAPTER 4 — KEY TAKEAWAYS

- ✦ Always carry pliers, staple gun, screwdriver, and tester bulb on your person
- ✦ Add 2 extra feet when measuring — short lines cause rework
- ✦ Clean surfaces before gluing; never staple through wire
- ✦ Cut zip tie tails after fastening — loose tails look sloppy

CHAPTER 5

Vehicle Use & Checklists

Vehicle Expectations



Cleanliness

Remove trash daily. Keep tools and materials organized in designated locations



Gas Receipts

Drop receipts in key drop box EOD.
Log miles, cost, and date



Safe Driving

Drive with traffic flow. Know your exits and turns in advance

Vehicle Expenses Tracking Sheet

Track the following daily. Use one row per day; total all columns at the end of the month.

Day	Total Miles	Gas Gal.	Gas Cost	Mileage	Service	Tolls	Repairs	Wash	Misc
1-31	...	...	...	...	...	...	...	...	...

Fleet Truck Morning Check-List

Complete this checklist every morning before leaving the shop.

 TOOL CHECKLIST

- | | |
|--|--|
| ☐ Tool Box (1) | ☐ Staple Gun (2) |
| ☐ Electric Glue Gun (1) | ☐ Big Battery — Glue Gun (1) |
| ☐ Small Battery — Glue Gun (1) | ☐ Corded Glue Gun (1) |
| ☐ Battery Charger (1) | ☐ Needle Nose Pliers (2) |
| ☐ Flathead Screwdrivers (2) | ☐ Measuring Wheel (1) |
| ☐ Knife / Box Cutter (1) | ☐ Mini Spool Bailing Wire (1) |
| ☐ Wrench (1) | ☐ Windex (1) |
| ☐ Paper Towels (1) | ☐ 22ft A-frame Ladder (1) |
| ☐ Additional Ladder 18–28ft (1) | |

 PRODUCT CHECKLIST

- | | |
|---|---|
| ☐ Bucket of “Warm White” C9 (1) | ☐ Bucket of “Red” C9 (1) |
| ☐ Bucket of Clips (1) | ☐ Bucket of Stakes (1) |
| ☐ Spool of Socket Wire (2) | ☐ Spool of Blank Wire (2) |
| ☐ Bin with Minis (2) | ☐ Container: Male/Female Plugs (1) |
| ☐ Container: Staples, Glue, Zip Ties (1) | |

CHAPTER 5 — KEY TAKEAWAYS

- ♦ Run the morning checklist every day — missing tools means lost time on-site
- ♦ Keep the vehicle clean; an unkempt truck costs scorecard points
- ♦ Drop gas receipts in the key drop box every night
- ♦ Track daily vehicle expenses and total them monthly

CHAPTER 6

Materials

Understanding your materials is just as important as knowing your tools. This chapter covers every product you will use in the field.

Material	Details	Notes
LIGHTING		
Mini Lights	Trees, Railings, Garland, Wreaths, Pillars	Wrap balls; tie plugs together
C5 / C7 Bulbs	Gutters, Windows, Pathways, Roofline, Ridges	Match bulb size to application
Lighting Spheres	6" and 9" sizes	Handle carefully — fragile
CLIPS & ATTACHMENT		
Flashing Clips	Metal flashing / drip edge	Most common clip type
Magnet Clips	Magnetic surfaces	Strong hold, easy removal
Circle Clips	Rounded or tile surfaces	Also works on flashing
WIRE & CONNECTORS		
Socket Wire	Male or female plugs on either side	12" or 15" spacing
Blank Wire / Lamp Cord	Draws power to lighting products	No sockets
Vampire Plugs	Male vs Female • In-Line T's	Ribbed right • Cut wire clean
ACCESSORIES		
Ground Stakes	Line walkways & driveways	Add 5 ft to measurements
Photo-cell Timer	Powers on at sunset, 8-hour default	Avoid multiple timers per property

Attachment Methods

Surface	Method	Watch Out
Flashing	Flashing clips or magnet clips	—
Tiles	Circle clips or flashing clips	—
Wood Eaves	Staples	Staples must NOT go through wire
Glue-safe surfaces	Hot glue	NEVER glue on stucco

DANGER

Never glue on stucco. Staples must never go through the wire — this causes a power short.

CAUTION — TIMERS

Avoid using multiple timers if possible. Each outlet receives different light levels, causing lights to turn on at different times. If multiple timers are necessary, split them logically (e.g., one for the home, one for landscaping).

Quick Reference: Plug Orientation

♦ MALE PLUGS ♦

Male plugs always point toward the power source. **Female plugs** always point away from power. When a step says "Female Out" or "Female @ the top," it means orient the female end so it faces outward or sits at the top, ready to receive the next connection back toward power.

CHAPTER 6 — KEY TAKEAWAYS

- ♦ Match the clip type to the surface — flashing clips, magnet clips, or circle clips
- ♦ Never glue on stucco; never staple through wire
- ♦ Add 5 extra feet when measuring for ground stakes
- ♦ Male plugs always point toward power; female plugs point away
- ♦ Avoid multiple timers per property — they cause uneven on-times



CHAPTER 7

Ladder Safety

Ladder safety is non-negotiable. Know the right setup for every situation.

SAFETY FIRST

Always have a spotter when using extension ladders. Use counter weight on tall saguaros. Never rush ladder setup.

Ladder Types



Little Giant Ladder

A-frame configuration with adjustable lock mechanisms.
(see training video)



Extension Ladder

Propping up safely, raising with rope, always have a spotter. *(see training video)*

Ladder Use by Surface

Surface	Setup	Key Rule
Palm Trees	Two man job. Ladders on opposite sides	Start from top, wrap down. Female plug at top
Standard Trees	A-frame for limbs and trunk	Use on limbs; position carefully
Cactus / Saguaro	A-frame if possible. One man front, one back	Always use counter weight on tall ones. Ladders must mirror
Canopies	Lean into thicker branches. Tie rope around branch	Spotter at bottom of ladder at all times

TRAINING VIDEOS

See training videos for Little Giant setup, extension ladder technique, and ladder spotting.

CHAPTER 7 — KEY TAKEAWAYS

- ✦ Always have a spotter when using extension ladders
- ✦ Use counter weight on tall saguaros — ladders must mirror each other
- ✦ Lean into thick branches on canopies and tie rope for safety
- ✦ Palm trees are always a two-man job, starting from the top

CHAPTER 8

Landscape Lighting

Landscape lighting transforms a property. Follow these procedures for professional results every time.

Wiring at Ground Level

1

Plan Your Route

Be efficient. Wire should always run behind trees and bushes in discreet locations.

2

Cross Walkways Safely

If wire crosses a walkway or step, hot glue it into the crack so it is not a tripping hazard.

3

Waterproof Grass Trees

Trees in grass must be waterproofed — electrical tape connections up to 4 feet off the ground.

Starting Trees

1

Determine Starting Point

Standard trees start at the bottom. Palms always start at the top underneath the bulk of the palm.

2

Tie Plugs Together

Always tie plugs together — keeps consistent spacing, simplifies takedowns, and reduces repairs. (*see training video*)

3

Fasten & Staple

Fasten plug on the backside. Staple plug to tree — always staple behind the mini driver.

4

Wrap the Middle First

Prioritize the middle of the tree. Wrap the middle first and shoot off from there.

Standard Trees

1

Start on the Back Side

Begin away from street view. If the tree has multiple trunks, starting points should meet in the middle.

2

Wrap Up the Center Trunk

Use 5 finger spacing until you get to the first limb.

3


“Double Back” on Limbs

Continue wrapping the main trunk after finishing small branches. Only double-back on small branches, not full limbs. Twigs can just be “outlined.”

4

Check from Street View

Step back and look from the street to ensure limbs and trunks look finished. (*see training video*)

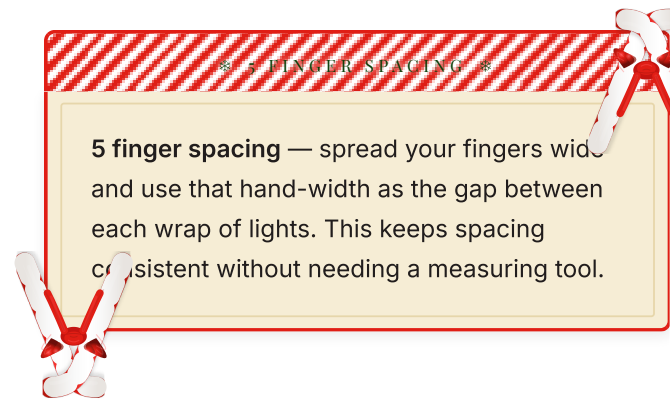**Canopy Wrap**

1

Connect Power

Plug into trunk lights or run a separate power source if the trunk is not wrapped.

2

Anchor on Back Side

Run minis to the back of the canopy and tie around a branch to anchor.

3

Wrap Consistently

About 2 feet between each line. Front-facing side: level, parallel lines. Back side: slanted to scale up.

4

Reach the Top**Always**

go to the very top. Use a painters pole for tall trees while your partner holds slack. (*see training video*)

WARNING

An unwrapped canopy top is highly visible and will be noted during quality inspection.

Lighting Spheres

1

Access the Canopy

See Chapter 7 (Ladder Safety) for canopy access techniques.

2

Start High, Work Down

Begin at the highest point. Space spheres evenly for a full lighting effect.

3

Call Ops Manager**Always**

call your Operations Manager when a sphere job is completed. *(see training video)*

Palm Trees

1

Test Lights First

You won't have power until finished since you start from the top.

2

Start from the Top

Wrap "Female Out" (female plug facing outward). Staple the line at the top to hold.

3

Wrap Down

Use 5 finger spacing. Keep lines consistent and parallel.

4

Finish at the Bottom


Staple the male plug on the backside of the palm tree.

Bushes & Hedges

Use the same wiring process as tree lighting. Run power to bushes before installing mini lights. Tie off around a branch on the bottom. The most important aspect is ensuring even light coverage. *(see training video)*

Troubleshooting Landscape

When lights aren't working, follow this diagnostic flow:



LIGHTS SHUT OFF RANDOMLY?

Most likely the lights got stapled or cut somewhere. Reset the GFI and plug in trees one at a time. Once the problem tree is found, unplug individual strands until you isolate the issue.

CHAPTER 8 — KEY TAKEAWAYS

- ✦ Wire runs behind trees in discreet locations — hot glue across walkways
- ✦ Always tie plugs together for consistent spacing and easier takedowns
- ✦ 5 finger spacing is the standard for tree wraps and palm wraps
- ✦ Always wrap to the very top of canopies — gaps are highly visible
- ✦ Troubleshoot power issues systematically: outlet → GFI → breaker → test bulb → new ball

CHAPTER 9

Residential Roofline Installs

Roofline installs are the core of the holiday lighting season. This chapter covers the complete workflow from arrival to closeout.

Install Roles

✎ Installation Crews

- Execute the full install — measuring, cutting, hanging, wiring, bulb check, cleanup, and job closeout

2-man crews are the most efficient grouping

★ Operations Manager

- Answers job questions, approves early clock-outs, handles escalations

Line item questions may go to the Sales rep

☑ Quality Pros

- Inspect completed installs immediately — sloppy work docks crew points

⚡ Repairmen

- Service jobs post-install affected by weather or negligence

CREW GOALS

2-man crews work best when goals are aligned. Discuss season goals and daily targets with your partner — having long-term and daily goals will drive your success as a crew.

Step-by-Step Workflow

1

Contact Customer En Route

Send text or call when heading to the job.

2

Arrive & Game Plan

View the work order and game plan with your partner.

3

Split & Prep

One installer contacts the customer, the other preps — find power sources, prep wire, ladders, C9's, clips, minis.

4

Execute the Install

Follow your game plan. Rooflines: measure and cut. Trees: one runs wire, the other preps balls.

Always

keep tools on your person (pliers, staple gun, screwdriver, tester bulb).

5

Secure & Hide Wiring

Tuck wire on homes, glue wire through cracks. All wiring should be as hidden as possible.

6

Bulb Check

One installer on ground, one on roof. Walk each roofline together: every bulb on, secured, no slack, no corners jumped.

7

Job Walk Through

Review every line item. Pick up any trash on ground or roof.

8

Pack Up & Notify

Ensure all tools are back in the vehicle. Notify the homeowner of completion.

9

Close Out & Move On

Close the job on the Field Service App. Contact your next appointment.

Establishing Starting Points

1

Find Power Close By

Starting point should be near an outlet on either side of the home. A sloppy wire in the middle is a half-point deduction.

2

Test the Outlet

Use a tester bulb to confirm the outlet is active.

3

Determine Hanging Method

Clips on flashing, clips on tile, clips on gutters, staples, hot glue, or ground stakes.

DROP EDGE

The drop edge (drip edge) is the metal flashing along the roofline where clips are inserted. Understanding the profile helps you choose the right clip type and insertion angle.

Measuring Rooflines


MEASURING WHEEL (MOST ACCURATE)

- ✓ Always reset the dial before measuring
- ✓ Best: walk the roofline from on top of the roof
- ✓ For tile roofs: follow from ground level

COUNTING TILES (QUICKEST)

- ✗ Not always the most accurate
- ✗ Curved tiles: peak to valley $\approx$ 1 foot
- ✗ Flat tiles: count each tile as 1 foot

2-Man Cut and Bulb

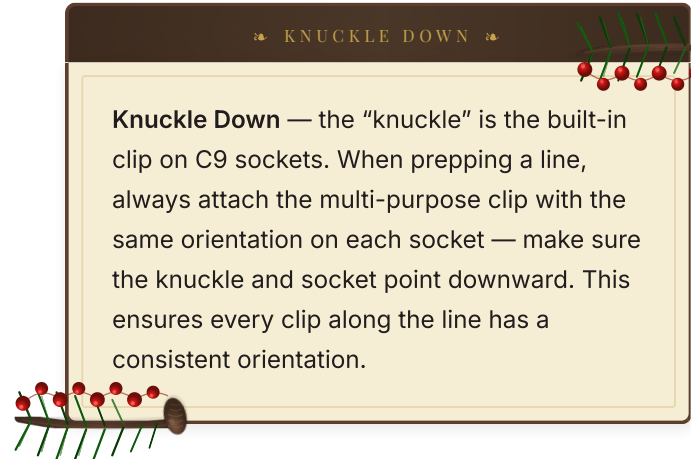

1

Measure & Cut

Installer 1 measures lines. Installer 2 pulls and cuts socket wire. Text measurements sequentially or keep a shared note.

2

Keep Lines in Order

Set cut lines on the ground in the same order they were measured. Do not mix up the order.

3

Bulb & Clip

One installer inserts bulbs, the other installs multi-purpose clips to each socket — knuckle down (built-in clip and socket pointing downward on every socket for consistent orientation). Finished lines go back in order on the ground.

4

Send Lines to Roof

Installer 2 takes the first two lines up, setting rolled lines on their corresponding rooflines. Installer 1 throws up remaining lines sequentially.

Prepping Lines

1

Unroll on Corresponding Line

Match each prepped line to its measured roofline section.

2

Check Clip Direction

Always make sure clips face the right direction — clips never lie.

3

Orient to Definite End

Unroll with the
definite end
in mind.

◆ DEFINITE END ◆

Definite End — a starting point or endpoint that will need an exact fit; no more roof line past that point.

PRO TIPS — PREPPING

Inside corners: Hook the line to something on the roof or leave part rolled at a stopping point.

Peaks: Find the middle bulb and place it at the peak.

Mixed surfaces: Some rooflines mix flashing, tile, gutters, and staples. “Flip the clips” as needed.

Efficiency: Installer 1 can pre-cut power lines while lines are being prepped.

Hanging Runs**RULE**

Always start with definite ends facing street view. First bulb goes right up against the definite end.

FROM THE ROOF (FASTEST)

- ✓ Getting on the edge is necessary
- ✓ Always keep three points of contact

FROM A LADDER (ALTERNATE)

- ✗ Move the ladder as little as possible
- ✗ Work at arm's length on both sides
- ✗ Use the “leap frog” method with partner

TILE GABLES & TIGHT FLASHING

Tile Gables: Use your screwdriver to loosen the nail, insert the clip with bulb, then hammer the nail back in with the butt end.

Tight Flashing: Wedge your screwdriver underneath to pry open.

Wiring Roof Line Lights

Each line connects with “zip cord” wire (blank wire with male and female plugs). All males point to power, females point away. Wire should always be tucked and hidden in corners between rooflines. Prep wire from the ground by counting tiles, or bring wire and plugs up to the roof.

Bulb & Quality Check

QUALITY CHECK — WALK-THROUGH ITEMS

- | | |
|--|--|
| ☐ Every bulb is on | ☐ Every bulb is secured |
| ☐ Lines have no slack | ☐ No corners jumped |
| ☐ No loose minis | ☐ No loose power cords |

Installer 1 on the ground, Installer 2 on the roof. Walk each roofline together. Found errors are fixed immediately by Installer 2. If lights won't come on, troubleshoot or call your Operations Manager.

Securing Peaks & Cleanup

1

Secure All Peaks

Put a #48 staple into the wood eave. No wooden eave? Use zip ties or bailing wire to hook the bulb to a nail through tile.

2

Clear the Roof

No tools, clips, pliers, or wire left behind. Found trash = point deduction.

3

Ground Cleanup & Notify

Installer 1 collects ground trash and contacts customer. Check off line items on the work order and close out the job.

CHAPTER 9 — KEY TAKEAWAYS

- ♦ Follow the 9-step workflow for every roofline install — no shortcuts
- ♦ Keep cut lines in order — mixing them up wastes time on the roof
- ♦ Always start hanging from the definite end facing street view
- ♦ Males point to power, females point away — always
- ♦ Run the full quality checklist before leaving — every error costs points

Windows, Walls, Stakes & Specialty

Specialty installations require attention to detail and surface awareness. Each surface type demands a different approach.

Windows

- 1

Plan the Outline
A bulb in every corner, every "middle point," and one in between. Visualize bulb count when measuring.
- 2

Mount to Surface
Most common: hot glue socket base to window face. Clean the glass first.
- 3

Alternative Surfaces
Stone/brick: glue directly. Stucco: **cannot** be glued. Last resort: install eyelets at corners, string bailing wire, fasten bulbs to wire.

Surface Compatibility

SAFE TO GLUE	CANNOT GLUE
✓ Glass (clean first) ✓ Stone or brick (direct mount) ✓ Metal surfaces ✓ Wood eaves (or use staples)	✗ Stucco — never use hot glue ✗ If stucco walls require it, be very minimal ✗ Call Ops Manager for stucco arches

Walls & Ground Stakes

Feature	Method	Key Detail
Walls (Stone/Brick)	Hot glue	Bulbs point up. If not level, lay flat — keep in line
Walls (Stucco)	Minimal glue	Add 1 foot to measurement
Ground Stakes	Mallet or hammer	Add 4–5 extra feet. Uniform depth & inline

Railings, Pillars & Arches

Feature	Method	Key Detail
Railings (Minis)	Pass ball between railing bars	Consistent spacing — inconsistency = point deductions
Railings (C9's)	Zip tie on either side of socket	Secure to top of railing
Pillars	Female plug at top, wrap down	6 finger spacing. Front side level, drops on back
Arches	Brick, stone, or metal only	Find middle bulb first, then hit each side. One glues, one holds

STUCCO ARCHES

If a stucco surface requires an arch, **always** call your Operations Manager for approval before proceeding.

CHAPTER 10 — KEY TAKEAWAYS

- ✦ Windows need a bulb in every corner and midpoint — uniform outlines only
- ✦ Never hot glue on stucco. Call Ops Manager for stucco approvals
- ✦ Ground stakes: add 4–5 extra feet and install uniform and inline
- ✦ Pillars use 6 finger spacing; arches start from the middle bulb

CHAPTER 11

Holiday Greenery

Greenery adds the finishing touch to holiday installations. Proper technique ensures they look full and stay secure.

Wreaths

6'

6-foot Wreath

Largest size. Statement piece for peaks

4'

4-foot Wreath

Standard peak or wall mount

3'

3-foot Wreath

Doors, gates, and fences

1

Wrap with Mini Lights

Per the work order. Wreaths on peaks typically need hardware in the wood eave.

2

Tile Peaks

Hook bailing wire to the nail at the peak and fasten the wire to the wreath's metal backing.

3

Fences & Gates

Use bailing wire. For gates that open, use split wreaths — install each side separately and run power on both sides. *(see training video)*

Garland & Bows

1

Match Garland Lengths

Always make sure garland lengths are equal on both sides.

2

Secure to Frame

Install screws or staples to the door frame. Zip tie garland to screws or staples.

3

Fluff & Finish

Make sure garland is fluffed. Bows go at the lowest point of the wreath or on wall sconces.

CHAPTER 11 — KEY TAKEAWAYS

- ✦ All wreaths need hardware — bailing wire for tile peaks, screws for wood eaves
- ✦ Split wreaths for opening gates — power both sides independently
- ✦ Garland lengths must be equal; always fluff before leaving
- ✦ Bows go at the lowest point of wreaths or on wall sconces



Removing Lights & Decor

Removals begin in early January once the holiday season wraps up. Removal work continues through January and into February as needed.

Removals Checklist

 REMOVALS LOAD-OUT

☐ Empty 57gal Totes w/ Lids (12)	☐ Pliers (2)
☐ Scrapers (2)	☐ Flathead Screwdrivers (2)
☐ Painters Poles (2)	☐ Painters Hooks (2)
☐ Limbcutter Extension (1)	☐ Sharpies (2)
☐ Pack of Notecards (1)	☐ Scotch Tape (1)
☐ Empty Clear Bucket (1)	

Removals Workflow

- 1

Arrive & Contact Customer
Notify the customer you're on-site.
- 2

Record Walkthrough Video
Film with lights on. Show all power sources, wire routes, landscaping, walls, pillars, and fences.
- 3

Remove Roofline Lighting
Start here. Ensure all clips are taken out of rooflines.
- 4

Remove Additional C9 Lighting
Take down walls, ground stakes, and any other C9 installations.

5

Remove Landscape Minis

Take down minis from trees, bushes, and hedges.

6

Roll & Stage

Each ball should be tightly rolled and set in front of the feature it belongs to.


7

Photo Document

Take a photo with balls in front of their assigned object. Add text: strand count + color (e.g., "4 Red").

CHAPTER 12 — KEY TAKEAWAYS

- ✦ Always record a walkthrough video with lights on before removing anything
- ✦ Remove roofline first, then C9s, then landscape minis
- ✦ Roll each ball tightly and stage in front of its feature for photo documentation
- ✦ Label photos with strand count and color for accurate re-installation

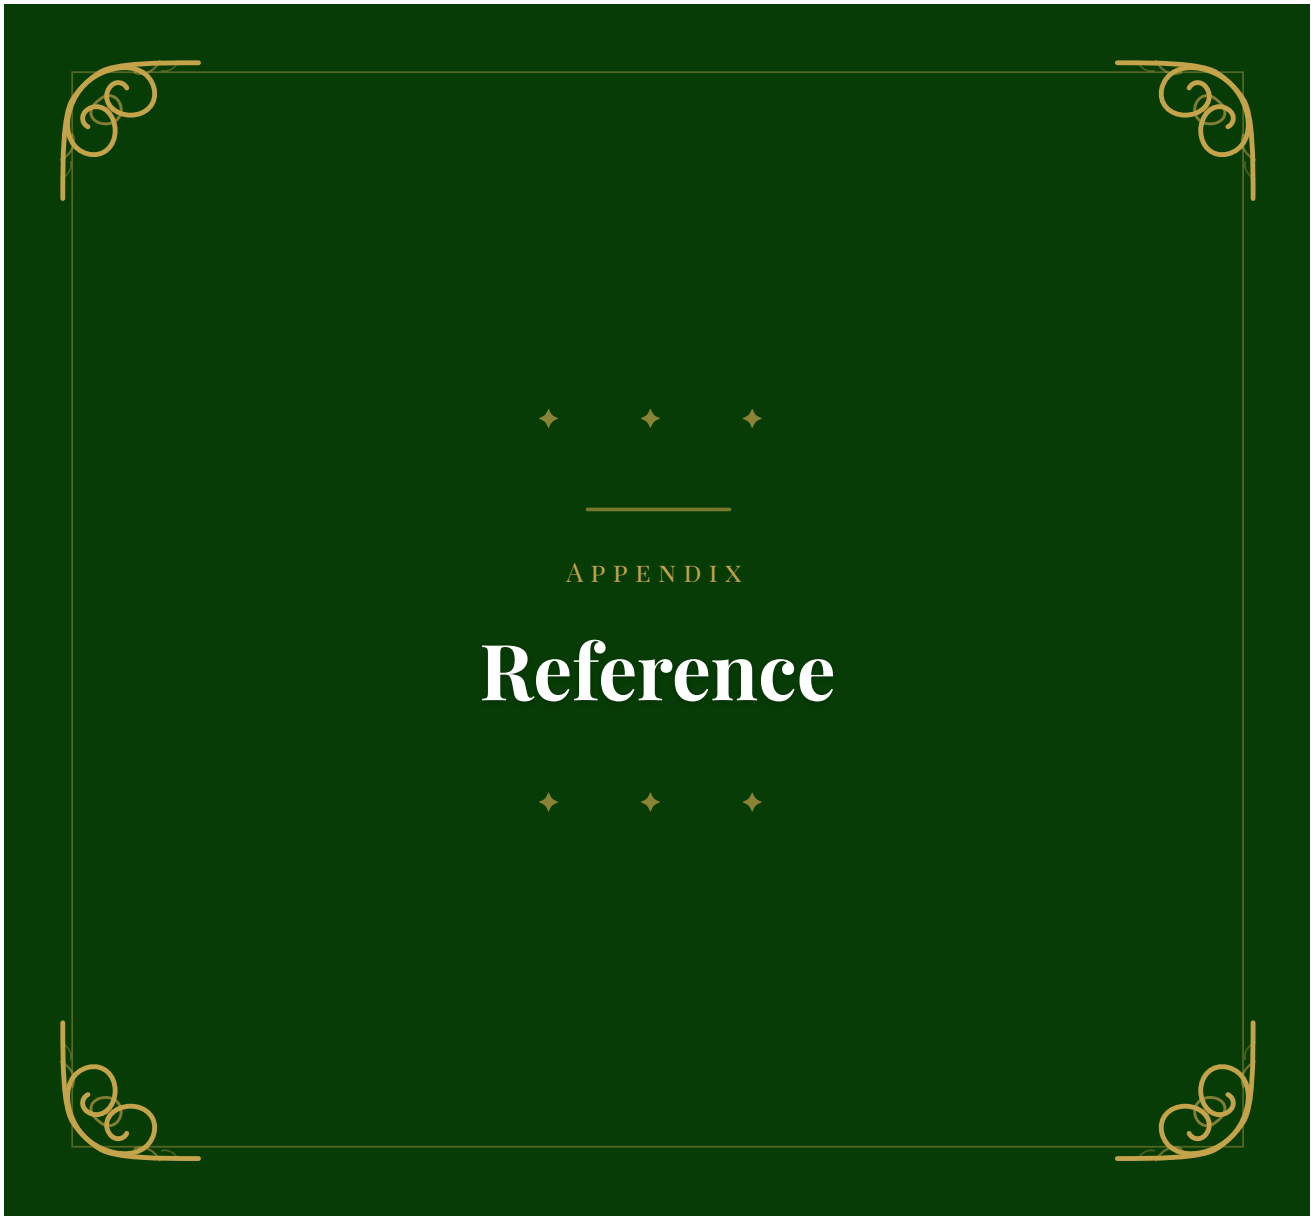

GLOSSARY

Terms & Definitions

Term	Definition
SCHEDULING & ROLES	
Black Out Day	A reserved schedule day — no one may call out or use vacation time on these dates
Quality Pro (QP)	Inspects completed installs immediately after the crew finishes. Missed items or sloppy work docks points from the project score
INSTALLATION TECHNIQUES	
Knuckle Down	The “knuckle” is the built-in clip on C9 sockets. When prepping a line, attach the multi-purpose clip with the knuckle and socket pointing downward on every socket to ensure consistent clip orientation along the entire line
5 Finger Spacing	Spread your fingers wide and use that hand-width as the gap between each wrap. Keeps spacing consistent without a measuring tool
6 Finger Spacing	Same technique as 5 finger spacing but with slightly wider gaps — used on pillars
Definite End	A starting point or endpoint on a roofline that requires an exact fit — no more roof line past that point
Drop Edge	The metal flashing along a roofline where clips are inserted (also called drip edge)
ELECTRICAL & WIRING	
Male Plug	Always points toward the power source
Female Plug	Always points away from the power source. “Female Out” or “Female @ the top” means orient the female end outward or at the top
Zip Cord	Blank wire with a male and female plug on either side, used to connect lines of lights
Socket Wire	Wire with bulb sockets — male or female plugs can be installed on either side
Blank Wire / Lamp Cord	Wire used solely to draw power to lighting products (no sockets)
Vampire Plug	A plug that pierces through wire insulation to make an electrical connection. “Ribbed right” when wiring
In-Line T	A vampire plug configuration that creates a T-junction to split power to multiple runs
GFI	Ground Fault Interrupter — the reset button on outdoor outlets. First thing to check when power isn’t working
PRODUCTS	
C5 / C7 / C9	Bulb sizes used for different applications — C9 is the most common for rooflines

Term	Definition
Photo-cell Timer	A light-activated timer that powers on at sunset. Standard setting is 8 hours

Holiday Light Co. — Field Training Manual



HOLIDAY LIGHT CO. — FIELD TRAINING MANUAL